

GIANINI

EXIT & EMERGENCY LIGHTS



Model No.: **GA-E046**

TECHNICAL DATA

Mode of Operation:	Non-Maintained
Lamp:	3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	D95*H95mm. Cut-out 75mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate.
Mounting:	Recessed Ceiling
IP rating:	IP30

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

Model No.: **GA-E038**

TECHNICAL DATA

Mode of Operation:	Non-Maintained
Lamp:	2x3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	265*135*60mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Electro galvanised steel with epoxy powder coating The adjustable fire-retardant lamp-heads comes with anti-glare lens
Mounting:	Wall or Suspended
IP rating:	IP30

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

Model No.: **GA-E039**

TECHNICAL DATA

Mode of Operation:	Non-Maintained
Lamp:	2x3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	250*270*50mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Electro galvanised steel with epoxy powder coating The adjustable fire-retardant lamp-heads comes with anti-glare lens
Mounting:	Wall or Suspended
IP rating:	IP30

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

Model No.: **GA-E041**

TECHNICAL DATA

Mode of Operation:	Non-Maintained
Lamp:	2x3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	280*315*75mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate. The adjustable fire-retardant lamp-heads comes with anti-glare lens
Mounting:	Wall or Suspended
IP rating:	IP30

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

Model No.: **GA-E044**

TECHNICAL DATA

Mode of Operation:	Non-Maintained
Lamp:	2x3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	300*110*80mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate. The adjustable fire-retardant lamp-heads comes with anti-glare lens
Mounting:	Wall or Suspended
IP rating:	IP30

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption

Model No.: **GA-E02711**



TECHNICAL DATA

Mode of Operation:	Maintained
Lamp:	3W/ 6W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	360*110*60mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate
Diffuser:	Fire retardant polycarbonate
Mounting:	Wall or Suspended
IP rating:	IP30

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

No Black Ends

Model No.: **GA-E050****TECHNICAL DATA**

Mode of Operation:	Non-Maintained
Lamp:	2x5W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	255*315*63mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate. The adjustable fire-retardant lamp-heads comes with anti-glare lens
Mounting:	Wall or Suspended
IP rating:	IP65

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption

Model No.: **GA-E0E1**

TECHNICAL DATA

Mode of Operation:	Non - Maintained
Lamp:	2x3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	355*165*65mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Enclosure is Die casted of Aluminum alloy with high voltage electrostatic powder coated surface after shot blasted.
Diffuser:	High strength toughened glass cover
Mounting:	Wall or Suspended
IP rating:	IP66

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

No Black Ends

Model No.: **GA-E048****TECHNICAL DATA**

Mode of Operation:	Maintained
Lamp:	3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 800mAH
Charging time:	24 Hrs
Dimension:	355*165*65mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Enclosure is Die casted of Aluminum alloy with high voltage electrostatic powder coated surface after shot blasted.
Diffuser:	Fire retardant acrylic
Mounting:	Wall or Ceiling
IP rating:	IP66

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption
- No Black Ends

Model No.: **GA-E04570****TECHNICAL DATA**

Mode of Operation:	Maintained
Lamp:	3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 800mAH
Charging time:	24 Hrs
Dimension:	370*220*50mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate
Diffuser:	Fire retardant acrylic
Mounting:	Wall or Ceiling
IP rating:	IP30

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption
- No Black Ends

Model No.: **GA-E02011****TECHNICAL DATA**

Mode of Operation:	Maintained
Lamp:	3W/ 6W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	350*230*120mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate
Diffuser:	Fire retardant acrylic
Mounting:	Wall or Ceiling
IP rating:	IP65

KEY FEATURES

Using surface Mount Technology LED

High Durability & Reliability

Low Heat

Low Maintenance

Low Power Consumption

No Black Ends

Model No.: **GA-E0390****TECHNICAL DATA**

Mode of Operation:	Maintained
Lamp:	3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 1800mAH
Charging time:	24 Hrs
Dimension:	390*190*60mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Electro galvanised steel with epoxy powder coating
Diffuser:	Fire retardant acrylic
Mounting:	Wall or Ceiling
IP rating:	IP30

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption
- No Black Ends

Model No.: **GA-E010208****TECHNICAL DATA**

Mode of Operation:	Maintained
Lamp:	3W LED Lamp
Rated duration:	3 hours and others
Mains Supply:	230 Volts, 50/60Hz
Power consumption:	< 3W
Battery:	Li-ion 3.7V 800mAH
Charging time:	24 Hrs
Dimension:	350*145*30mm
Test Facility:	Micro switch
Safety Feature:	Low volt cut-off preventing battery overdischarge
Fitting Construction:	Injection moulded fire retardant, high impact polycarbonate
Diffuser:	Fire retardant acrylic
Mounting:	Wall or Ceiling
IP rating:	IP30

KEY FEATURES

- Using surface Mount Technology LED
- High Durability & Reliability
- Low Heat
- Low Maintenance
- Low Power Consumption
- No Black Ends

KEY FEATURES

Can be incorporated into combined maintained, non-maintained


Can be used LED Tube - Downlight - Panel

Please ensure that your LED Lamp & Driver are suitable for Emergency installation

Model No.: GA D50W



Model No.: GA D48W

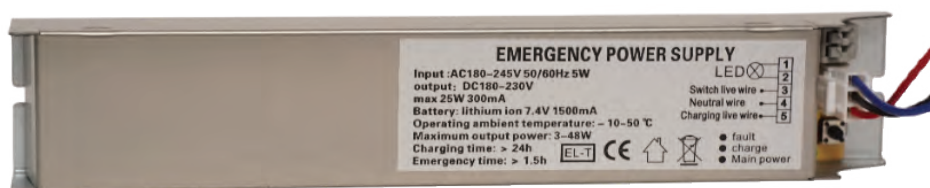

TECHNICAL DATA	GA D50W	GA D48W
Mode of Operation:	Maintained & Non-Maintained	Maintained & Non-Maintained
Lamp:	3W-50W LED Lamp	3W-50W LED Lamp
Rated duration:	> 2 hours	> 2 hours
Mains Supply:	230 Volts, 50/60Hz	230 Volts, 50/60Hz
Power consumption:	< 3W	< 3W
Battery:	Li-ion 11.1V 1500 - 3000mAh	Li-ion 7.4V 1500 - 3000mAh
Charging time:	24 - 36 Hrs	24 - 36 Hrs
Dimension:	350*145*30mm	350*145*30mm
Test Facility:	Push button switch	Push button switch
Safety Feature:	Low volt cut-off preventing battery overdischarge	Low volt cut-off preventing battery overdischarge
Fitting Construction:	ABS	ABS
IP rating:	IP30	IP30

Contact Us:



VTL TECH CO., LTD.

SOLUTION PROVIDER FOR INDUSTRIES

3Brd Floor Scetpa Building, 19A Cong Hoa Street, Bay Hien Ward, Ho Chi Minh City, Vietnam

Tel: (+84-28) 3811 0510 / 11

Fax: (+84-28) 3811 0512

Website: www.vtltech.com.vn

Email: info@vtltech.com.vn

